


Terminal Relays

RT2-11

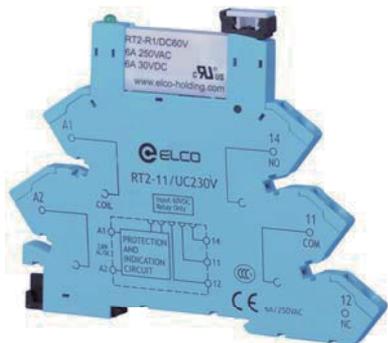

Description :

1C/O contact, 6.2mm in width

Character :

- Max. contact load 6A/250V AC1

Specifications :

Type	RT2-11/UC24V	RT2-11/UC230V
Input voltage	24VUC	230VUC
Input current	36mA	90mA
Status indicator	Green LED	Green LED
Output		
Max. switched voltage	400VAC/125VDC	400VAC/125VDC
Max. switched current	6 A	6 A
Max. power rating	1500 VA/180 W	1500 VA/180 W
Contact material	AgNi	AgNi
Pick-up / release time	8/4 ms	8/4 ms
General data		
Mechanical life ops	1x10 ⁷	1x10 ⁷
Test isolation voltage	4 kV/AC; EN 60947-1	4 kV/AC; EN 60947-1
Temperature	-40...+70°C	-40...+55°C
Mounting method	DIN-rail	DIN-rail
Dimension (H x W x H)	101.6x6x79.7 mm	101.6x6x79.7 mm
Type of relay	RT2-R1/DC24V	RT2-R1/DC60V
Coil resistance	3390Ω (± 15%)	16600Ω (± 15%)


Accessories:

Bridge bars RT2-BR1-BU



Technical approvals,conformities:



Connection diagram :

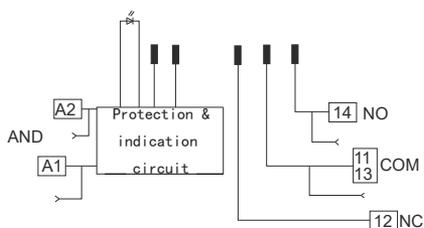

Dimensions[mm]:

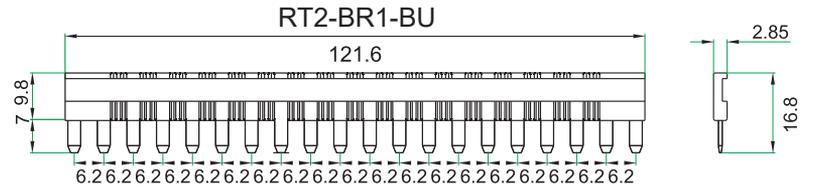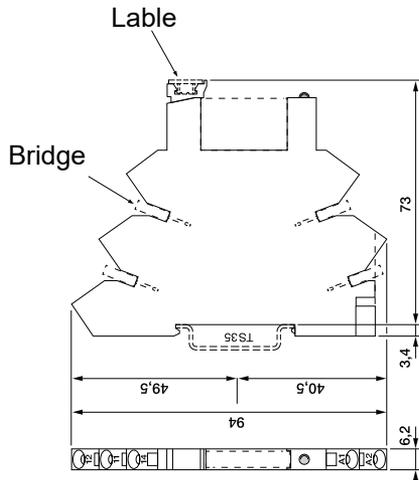

Blue bridge bar

Figs:

