


- Mini Shaped IO-Link IP20 Hub
- IO-LINK Version 1.1.3
- COM2 (38.4kbps), Class A
- Pluggable I/O terminal blocks



Ordering data				
Product type	LKHA-0800P-QM	LKHA-044UP-QM	LKHA-0800N-QM	LKHA-044UN-QM
Description	8DI,PNP, 8x3-Pos terminals	4DI+4DIO,PNP, 8x3-Pos terminals	8DI,NPN, 8x3-Pos terminals	4DI+4DIO, NPN, 8x3-Pos terminals
Connection				
IO-Link	1xM12 A-CODE 4-PIN, Male			
Power supply	Included in IO-Link interface			
Input/Output	8x3-Pos Pluggable terminal blocks			
Electrical data				
Input	8	Max. 8	8	Max. 8
Input supply current	Max 200 mA per channel,Sum 1.6 A			
Input delay	1.6ms			
Output	-	Max. 4	-	Max. 4
Output current	-	Max 500mA/Channel, Sum 2A	-	Max 500mA/Channel, Sum 2A
Output type	-	Lamps, solenoidvalve, Etc	-	Lamps, solenoidvalve, Etc
Output frequency	-	Resistive 100Hz, Inductive 5Hz	-	Resistive 100Hz, Inductive 5Hz
Diagnostics				
Communication status	LED indication, Communication message			
Voltage detection	LED indication			
Short-circuit & Overload	LED indication, Communication message			
General data				
Protection Class	IP20			
Installation	Fixed by mounting bracket			
Temperature	Operating -25 ... +70 °C, Storage -40 ... +85 °C			
Dimensions (W*H*D)	95 mm x 25mm x 22mm			

Dimension drawing

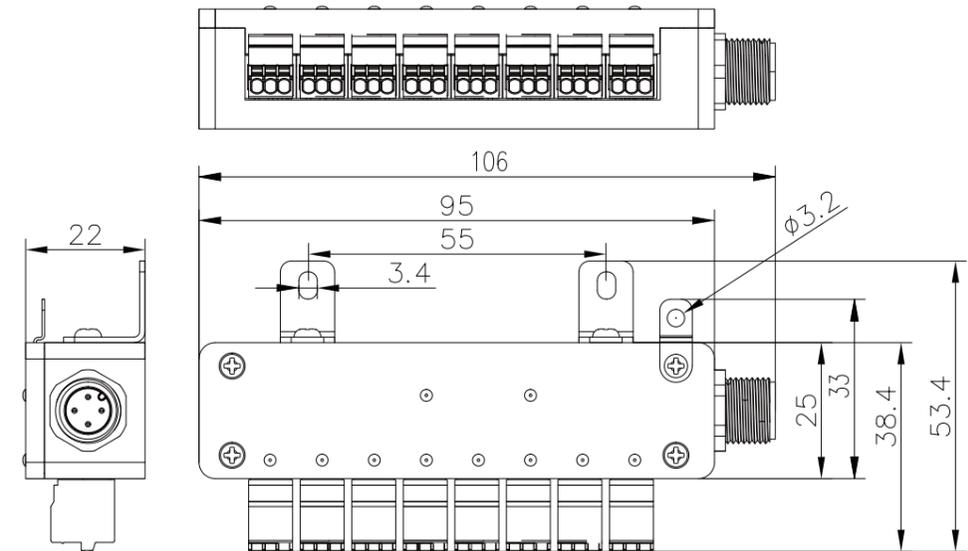

Interface drawing

